


## Flush Mount to Wall/Curb New Construction

### FlexGround EnduraFlex Detail

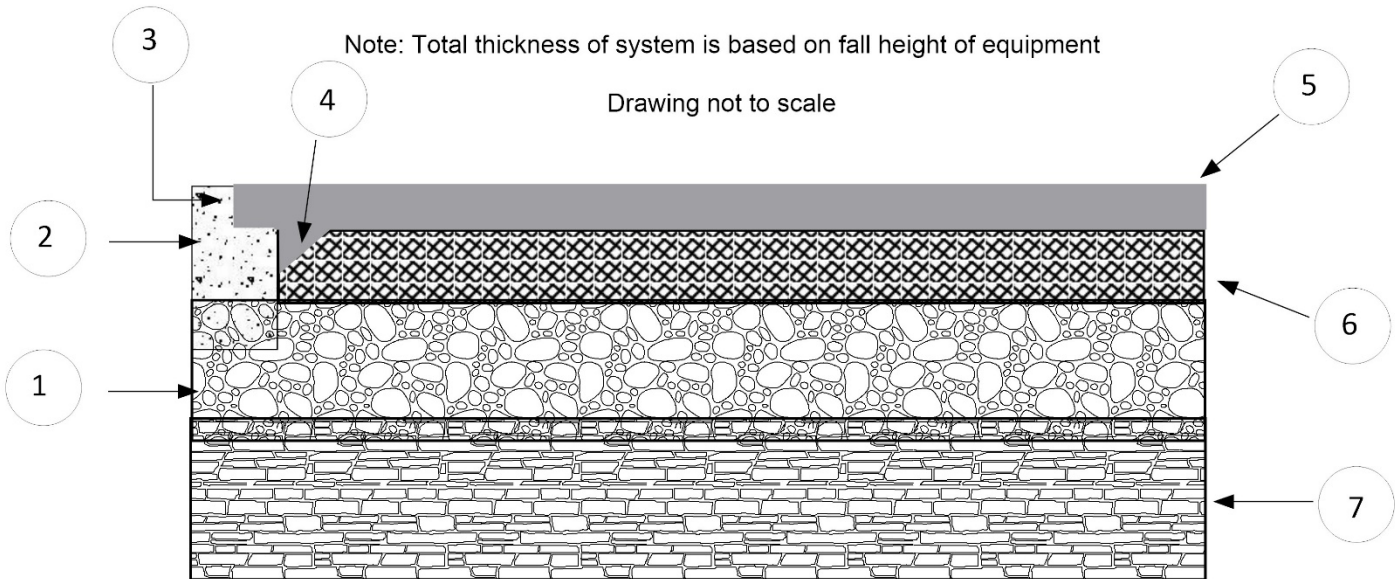

Note: Total thickness of system is based on fall height of equipment

Drawing not to scale

- |   |  |
|---|--|
| <ol style="list-style-type: none"> <li>1. 4" of ABC compacted to 95%<br/>(Concrete or asphalt acceptable)</li> <li>2. Concrete edge</li> <li>3. Allow 3" overlap of TPV<br/>over concrete edge 1/2" deep</li> </ol> | <ol style="list-style-type: none"> <li>4. 3/4" deep 45° cushion layer turndown<br/>filled with TPV</li> <li>5. 1/2" (12.7 mm) TPV<br/>safety rubber</li> <li>6. SBR cushion layer</li> <li>7. Well prepared sub grade</li> </ol> |
|---|--|

**ARIZONA**  
Lic #288687 & 283192  
602.954.0000

**CALIFORNIA**  
Lic #1003439  
916.474.5431

**NEVADA**  
Lic #0076764 & 0077757  
702.303.8701