


INSTALLATION AT EQUIPMENT EDGE

FLEXGROUND ENDURAFLEX DETAIL

NOTE: TOTAL THICKNESS OF SYSTEM IS BASED ON FALL HEIGHT OF EQUIPMENT
DRAWING NOT TO SCALE

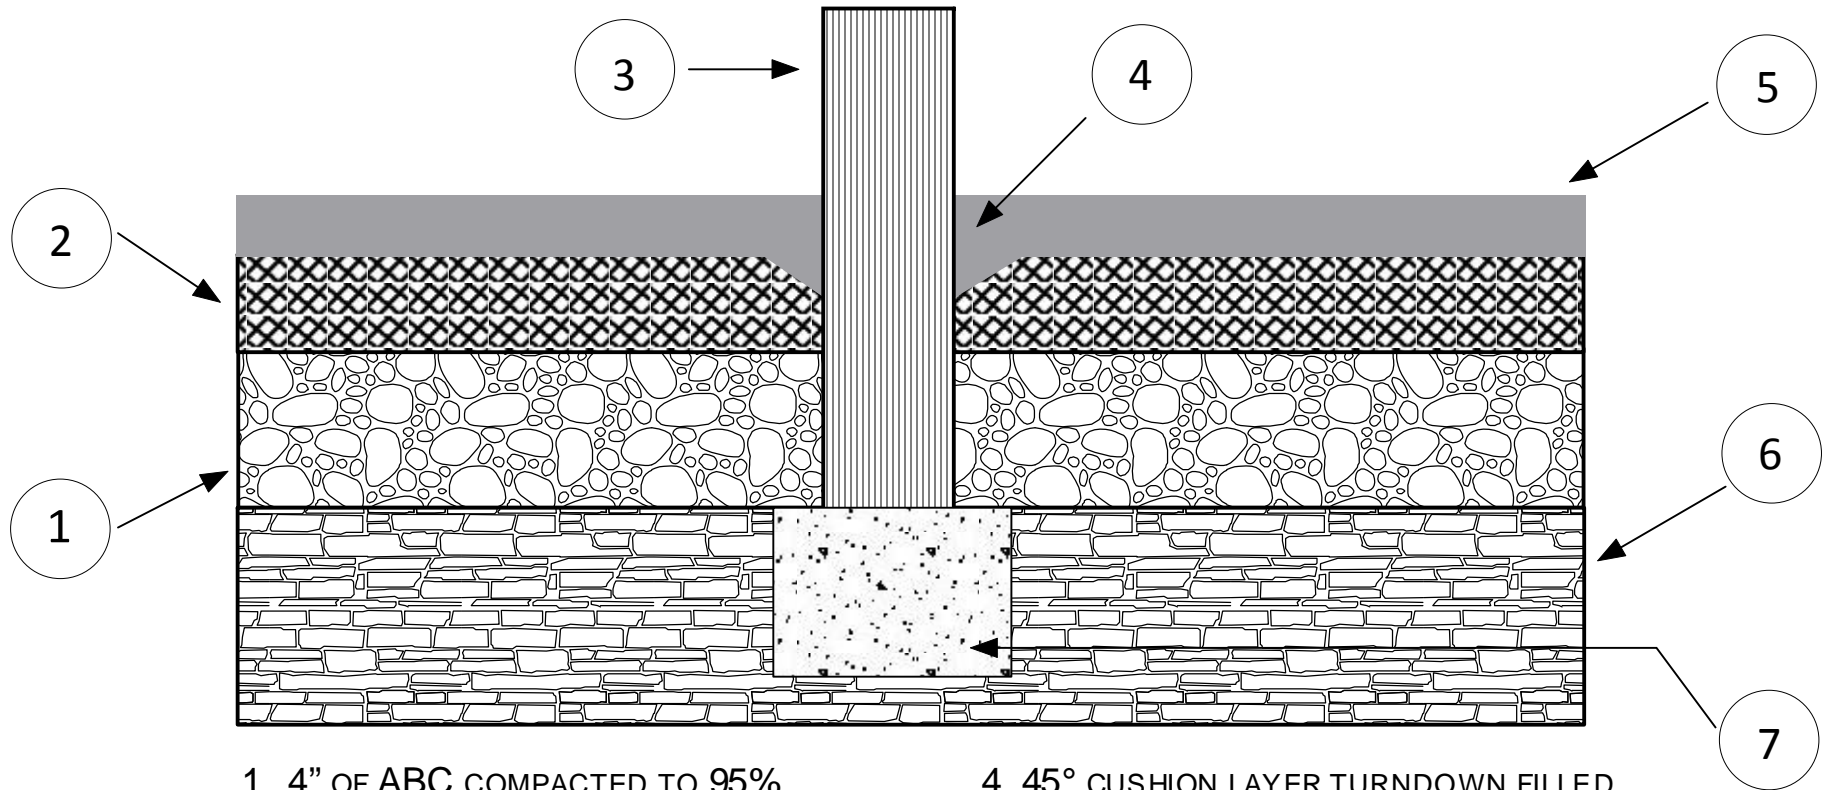

1. 4" OF ABC COMPACTED TO 95%
(CONCRETE OR ASPHALT ACCEPTABLE)
2. SBR CUSHION LAYER
3. EQUIPMENT POST

4. 45° CUSHION LAYER TURNDOWN FILLED
WITH TPV
5. ½" (12.7MM) TPV RUBBER SURFACE
6. WELL PREPARED SUB GRADE
7. EQUIPMENT FOOTER