


## Installation at Equipment Edge FlexGround FlexGrass Detail

Note: Total thickness of system is based on fall height of equipment  
Drawing not to scale

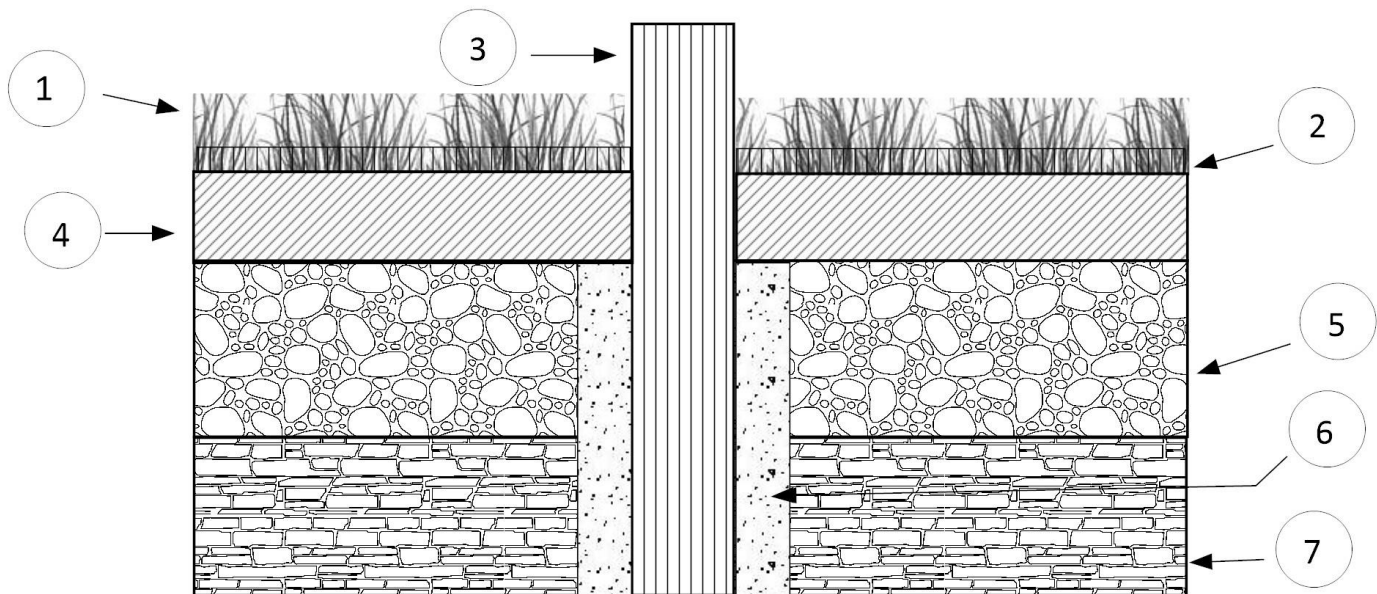

1. Synthetic turf
2. Non-expansive engineered fill
3. Equipment post
4. SBR cushion layer, depth based on fall height

5. 4" of ABC compacted to 95% (concrete or asphalt acceptable)
6. Equipment footing
7. Well prepared sub grade

**ARIZONA**  
Lic #288687 & 283192  
602.954.0000

**CALIFORNIA**  
Lic #1003439  
916.474.5431

**NEVADA**  
Lic #0076764 & 0077757  
702.303.8701