


Seam Transition

FlexGround Detail

Note: Total Thickness Of System Is Based On Fall Height Of Equipment

Drawing Not To Scale

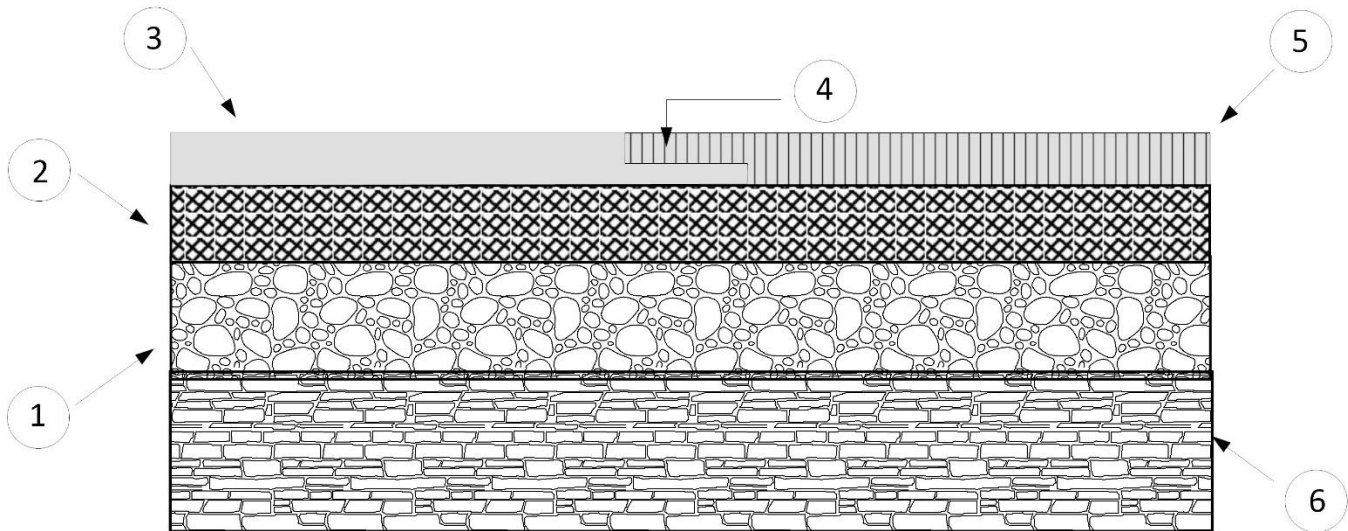

- | | |
|---|--|
| 1. 4" of ABC compacted to 95%
(Concrete or asphalt acceptable) | 4. Seam overlap |
| 2. SBR cushion layer | 5. 1/2" (12.7 mm) EPDM
second color |
| 3. 1/2" (12.7mm) EPDM first color | 6. Well prepared sub grade |

ARIZONA
Lic #288687 & 283192
602.954.0000

CALIFORNIA
Lic #1003439
916.474.5431

NEVADA
Lic #0076764 & 0077757
702.303.8701