


## Seam Transition

### FlexGround UltraFlex Detail

Note: Total Thickness Of System Is Based On Fall Height Of Equipment

Drawing Not To Scale

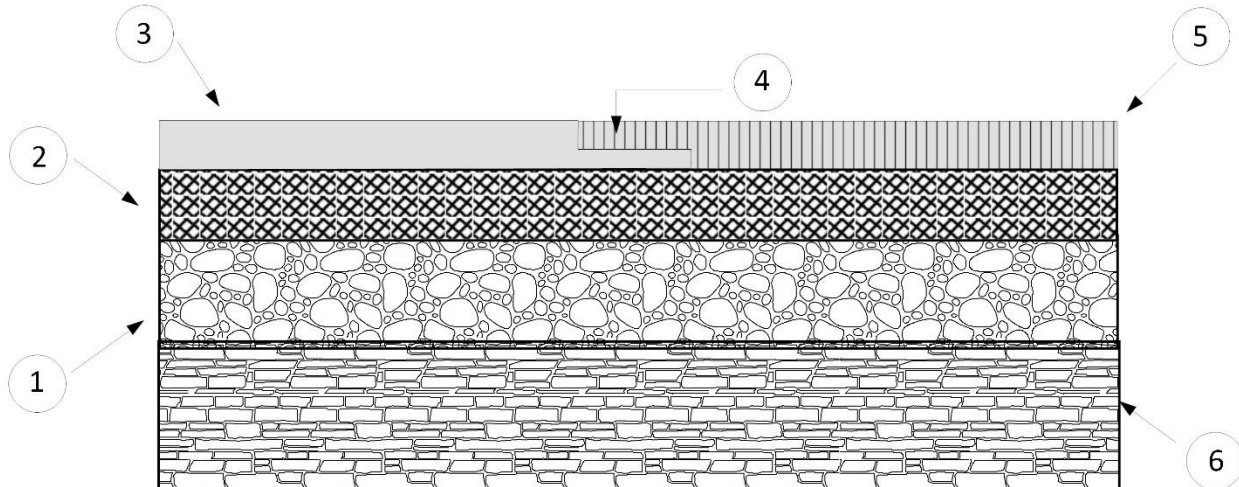

- |   |                                     |
|---|-------------------------------------|
| 1. 4" of ABC compacted to 95%<br>(Concrete or asphalt acceptable) | 4. Seam overlap                     |
| 2. SBR cushion layer  | 5. ½" (12.7 mm) TPV<br>second color |
| 3. ½" (12.7mm) TPV first color                                    | 6. Well prepared sub grade          |

**ARIZONA**  
Lic #288687 & 283192  
602.954.0000

**CALIFORNIA**  
Lic #1003439  
916.474.5431

**NEVADA**  
Lic #0076764 & 0077757  
702.303.8701