


Tapered Edge With Keyway FlexGround UltraFlex Detail

Note: Total Thickness Of System Is Based On Fall Height Of Equipment
Drawing Not To Scale

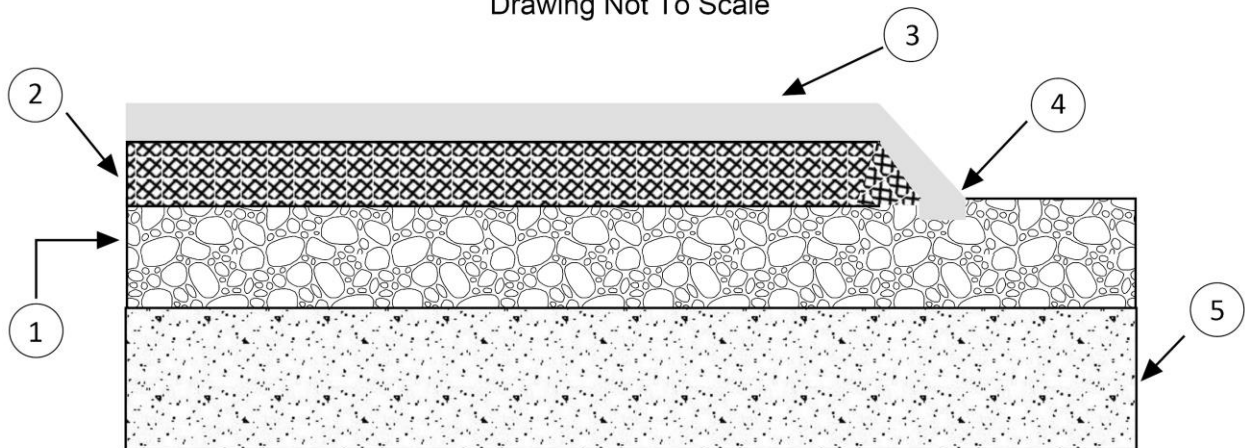

- | | |
|--|--|
| <ol style="list-style-type: none"> 1. 4" of ABC compacted to 95%
(Concrete or asphalt acceptable) 2. SBR cushion layer 3. 1/2" (12.7mm) TPV safety rubber | <ol style="list-style-type: none"> 4. 1/2" x 1 1/2" keyway outside perimeter
of grade 5. Well prepared sub grade |
|--|--|

ARIZONA
Lic #288687 & 283192
602.954.0000

CALIFORNIA
Lic #1003439
916.474.5431

NEVADA
Lic #0076764 & 0077757
702.303.8701